

FENCE AND OVERHANG DETECTORS




ACTI-TOP

OVERHANG DETECTOR WITH
AUTOMATIC RESET



PERFORMANCE FEATURES

- **Very reliable** product
- **High performance** detection
- **Broad** product range
- Installation and maintenance made **easier**
- **MAXIBUS Universal** compatible via an **MI8 module**: VMS Integration

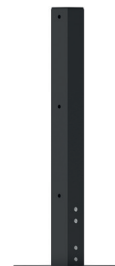

STRAIGHT OVERHANG



V-SHAPED OVERHANG



TILTED OVERHANG



HIGHLY RELIABLE PRODUCT

- Optimised System by combining two functions:
 - **physical protection**
 - **detection guaranteed** when the overhang is mechanically operated and equipped with an automatic reset
- **Products and detection are not impacted** by weather conditions (strong wind, rain, snow, cold, etc.)

HIGH-PERFORMANCE DETECTION

- Dynamometric tuning of the **detection force**
- **Automatic reset** of the mechanism
- **Patented system:** N°17 58866
- **Instant response**
- **Zero false alarms**
- **Up to 4 detection zones per control unit:** optimized confirmation

EASIER INSTALLATION AND MAINTENANCE

- **System sold installation included:** top operating performances thanks to the installation work of our experts
- **Modular system:** installation on any support (wall, roof...) and on any fence pole profile (wire mesh or other)
- **System integrity:** detection ensured even in case of attack against the outrigger equipment
- **Reduced maintenance:** automatic reset of the outrigger with no need for maintenance work.
- **No civil engineering work needed**

A BROAD RANGE

- **3 models available in the range:**
 - straight overhang
 - 45° tilted overhang
 - in «V»
- **Related Protective Equipment:**
 - deterrent elements: barbed wire, concertina
 - physical obstruction elements: simple wire mesh panels or ACTI-FENCE® sensor panels®
- **Complementary product ranges** with accessories for the overhang (rotary harrows, etc.)
- **Customization option:** painting with RAL color selected by you


MAXIBUS UNIVERSAL COMPATIBLE VIA MI8

OPTIMISED ALARM MANAGEMENT...

- **Centralisation of all system alarms** to a single point
- **Remote access to products:** configuration and maintenance
- **Embedded** web server
- **Time and date stamped history** of alarm events

...DESIGNED FOR SIMPLIFIED INTEGRATION ON ALL YOUR SITES

- **Integration with VMS**
- **Easy integration:** API available
- **Secure** data transmission: **802.1x**, TLS, etc.
- **Various** alarm transmission **protocols:** ModBus, API
- **Dry contact outputs:** up to **136 relays**

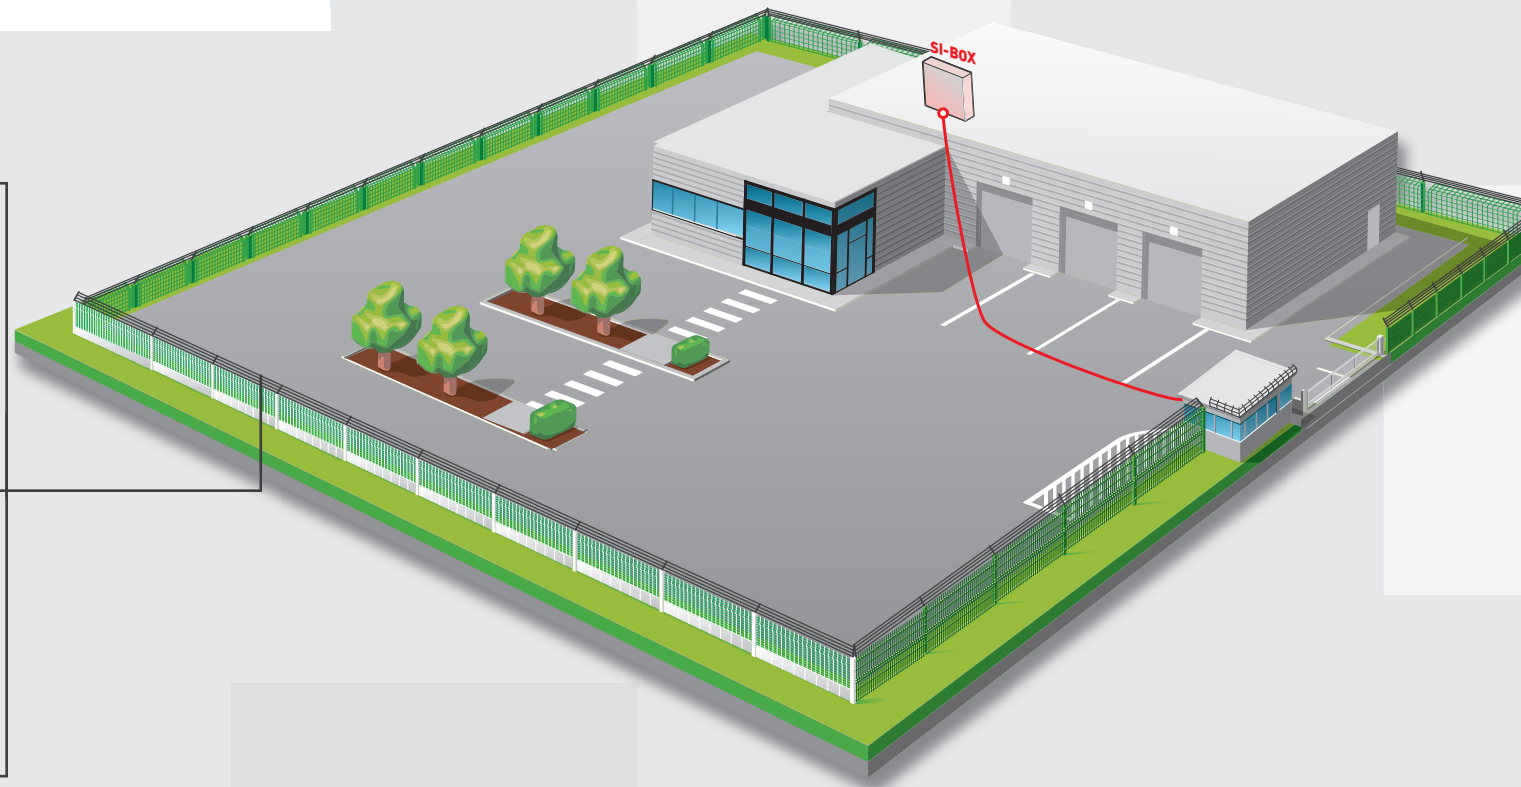

TECHNICAL CHARACTERISTICS

	ACTI-TOP
Operation	Configurable dynamic system triggered by intrusion Automatic reset
Double Protection	Physical protection: increasing the fence height Intrusion detection
Overhang format	Straight / at 45° / «V» shape
Option	Led for visual checking of the system operating in maintenance mode
Additional protective equipment*	Optional: Concertina, barbed wire, wire fence or ACTI-FENCE® panel

	ACTI-CENTRALE: CONTROL CENTER
Power supply	230 Vac or solar panels
Alarm information	Dry contacts
MAXIBUS Universal compatible	via M18 for VMS integration
Enclosure weight	6 kg
Enclosure composed of	Painted steel
Operating temperature	-25°C to +65°C

* mandatory to maximize security